

F SERIES

96% AFUE GAS FURNACES

All gas furnaces except (F,K)G8SA & FG8SD feature SmartLite[®] Control Boards

FG7T(E, N)-VS
96% AFUE Ultra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage (Dedicated Upflow, Downflow), iQ Drive Ready, Variable-Speed ECM Blower Motor, 60,000 - 115,000 BTUH Input

FG7TE-FS
96% AFUE Ultra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage Dedicated Upflow, Multi-Speed ECM Blower Motor, 35,000 - 115,000 BTUH Input

95.1% AFUE GAS FURNACES

FG7TC-VS
95.1% AFUE Extra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage Upflow/Horizontal, iQ Drive Ready, 60,000 - 120,000 BTUH Input, Variable-Speed ECM Blower Motor

95% AFUE GAS FURNACES

FG7SD-FS
95% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 38,000 - 120,000 BTUH Input

FG8SD-FS
95%+ AFUE Ultra-Low NOx, High Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 50,000 - 100,000 BTUH Input

92.1% AFUE GAS FURNACES

FG7SC-FS
92.1% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 38,000 - 120,000 BTUH Input

80% AFUE GAS FURNACES

FG8SA-FS
80% AFUE Ultra-Low NOx, Standard Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 55,000 - 100,000 BTUH Input

FG7TA-VS
80% AFUE Mid Efficiency, 2-Stage Upflow/Horizontal, iQ Drive Ready, 60,000 - 120,000 BTUH Input, Variable-Speed ECM Blower Motor

FG7S(A, K)-FS
80% AFUE Standard Efficiency, 1-Stage (Upflow/Horizontal, Downflow), Multi-Speed ECM Blower Motor, (45,000 - 126,000, 54,000 - 126,000) BTUH Input

K SERIES

96% AFUE GAS FURNACES

KG7T(E,N)-FS
96% AFUE Ultra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage (Dedicated Upflow, Downflow), Multi-Speed ECM Blower Motor, (35,000 - 115,000, 60,000 - 115,000) BTUH Input

95.1% AFUE GAS FURNACES

KG7TC-FS
95.1% AFUE Extra High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 2-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 60,000 - 120,000 BTUH Input

95% AFUE GAS FURNACES

KG7SD-FS
95% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 38,000 - 120,000 BTUH Input

92.1% AFUE GAS FURNACES

KG7SC-FS
92.1% AFUE High Efficiency, Direct Vent or Non-Direct Vent, Condensing, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 38,000 - 120,000 BTUH Input

80% AFUE GAS FURNACES

KG8SA-FS
80% AFUE Ultra-Low NOx, Standard Efficiency, 1-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 55,000 - 100,000 BTUH Input

KG7TA-FS
80% AFUE Mid Efficiency, 2-Stage Upflow/Horizontal, Multi-Speed ECM Blower Motor, 60,000 - 120,000 BTUH Input

KG7S(A, K)-FS
80% AFUE Standard Efficiency, 1-Stage (Upflow/Horizontal, Downflow), Multi-Speed ECM Blower Motor, (45,000 - 126,000, 54,000 - 126,000) BTUH Input

CONVERTIBLE AIRFLOW PACKAGED SYSTEMS

All gas/electric and iHybrid[®] packaged systems feature SmartLite Control Boards

All packaged systems feature enhanced coil technology

DF6SF
iHybrid Dual Fuel, 2-Stage Gas Heat/2-Stage Cooling, Variable-Speed Blower, Square Duct Connections, Convertible Airflow, 15 SEER, 81% AFUE, 8.0 HSPF, 12 EER, 2 - 5 Ton, 80,000 - 120,000 BTUH Input

R8HE
Gas/Electric, 2-Stage Heat, Square Duct Connections, Convertible Airflow, 14 SEER, 95% AFUE, up to 12 EER, 2 - 5 Ton, 60,000 - 96,000 BTUH Input

R8GE
Gas/Electric, Square Duct Connections, Convertible Airflow, 14 SEER, 81% AFUE, 11 EER, 2 - 5 Ton, 45,000 - 120,000 BTUH Input

R8GE-ULN
Ultra-Low NOx Gas/Electric, Square Duct Connections, Convertible Airflow, 14 SEER, 81% AFUE, 11 EER, 2 - 5 Ton, 55,000 - 100,000 BTUH Input

P8SE
Air Conditioner, Square Duct Connections, Convertible Airflow, 14 SEER, up to 11.5 EER, 3 - 5 Ton

CONVERTIBLE AIRFLOW PACKAGED SYSTEMS continued

Q6SE
Heat Pump, Square Duct Connections, Convertible Airflow, 14 SEER/8.0 HSPF, 11 EER, 3 - 5 Ton

HORIZONTAL AIRFLOW PACKAGED SYSTEMS

P7RF
Air Conditioner, 2-Stage Cooling, 5 speed ECM Blower, Round Duct Connections, 16 SEER, 12 EER, 2 - 5 Ton

P7RE
Air Conditioner, Round Duct Connections, 14 SEER, 11 EER, 1-1/2 - 5 Ton


Q7RE
Heat Pump, Round Duct Connections, 14 SEER/8.0 HSPF, 11 EER, 2 - 5 Ton



ENERGY STAR[®] certification is awarded to products designed to reduce energy consumption and utility costs. To qualify, packaged systems must have a Seasonal Energy Efficiency Ratio (SEER) rating of 15.0 or higher and an Energy Efficiency Ratio (EER) of 12.0 or higher. Packaged heat pumps must also have a Heating Seasonal Performance Factor (HSPF) of 8.2 or higher.

Gas furnaces must have an AFUE of 95% or higher for northern states, at least 90% AFUE for southern states, have an approved energy efficient blower motor and cabinet air leakage of less than or equal to 2%.

Split system air conditioners and heat pumps must have a 15.0 SEER rating or higher and an EER of 12.5 or higher. Split system heat pumps must also have an HSPF of 8.5 or higher.

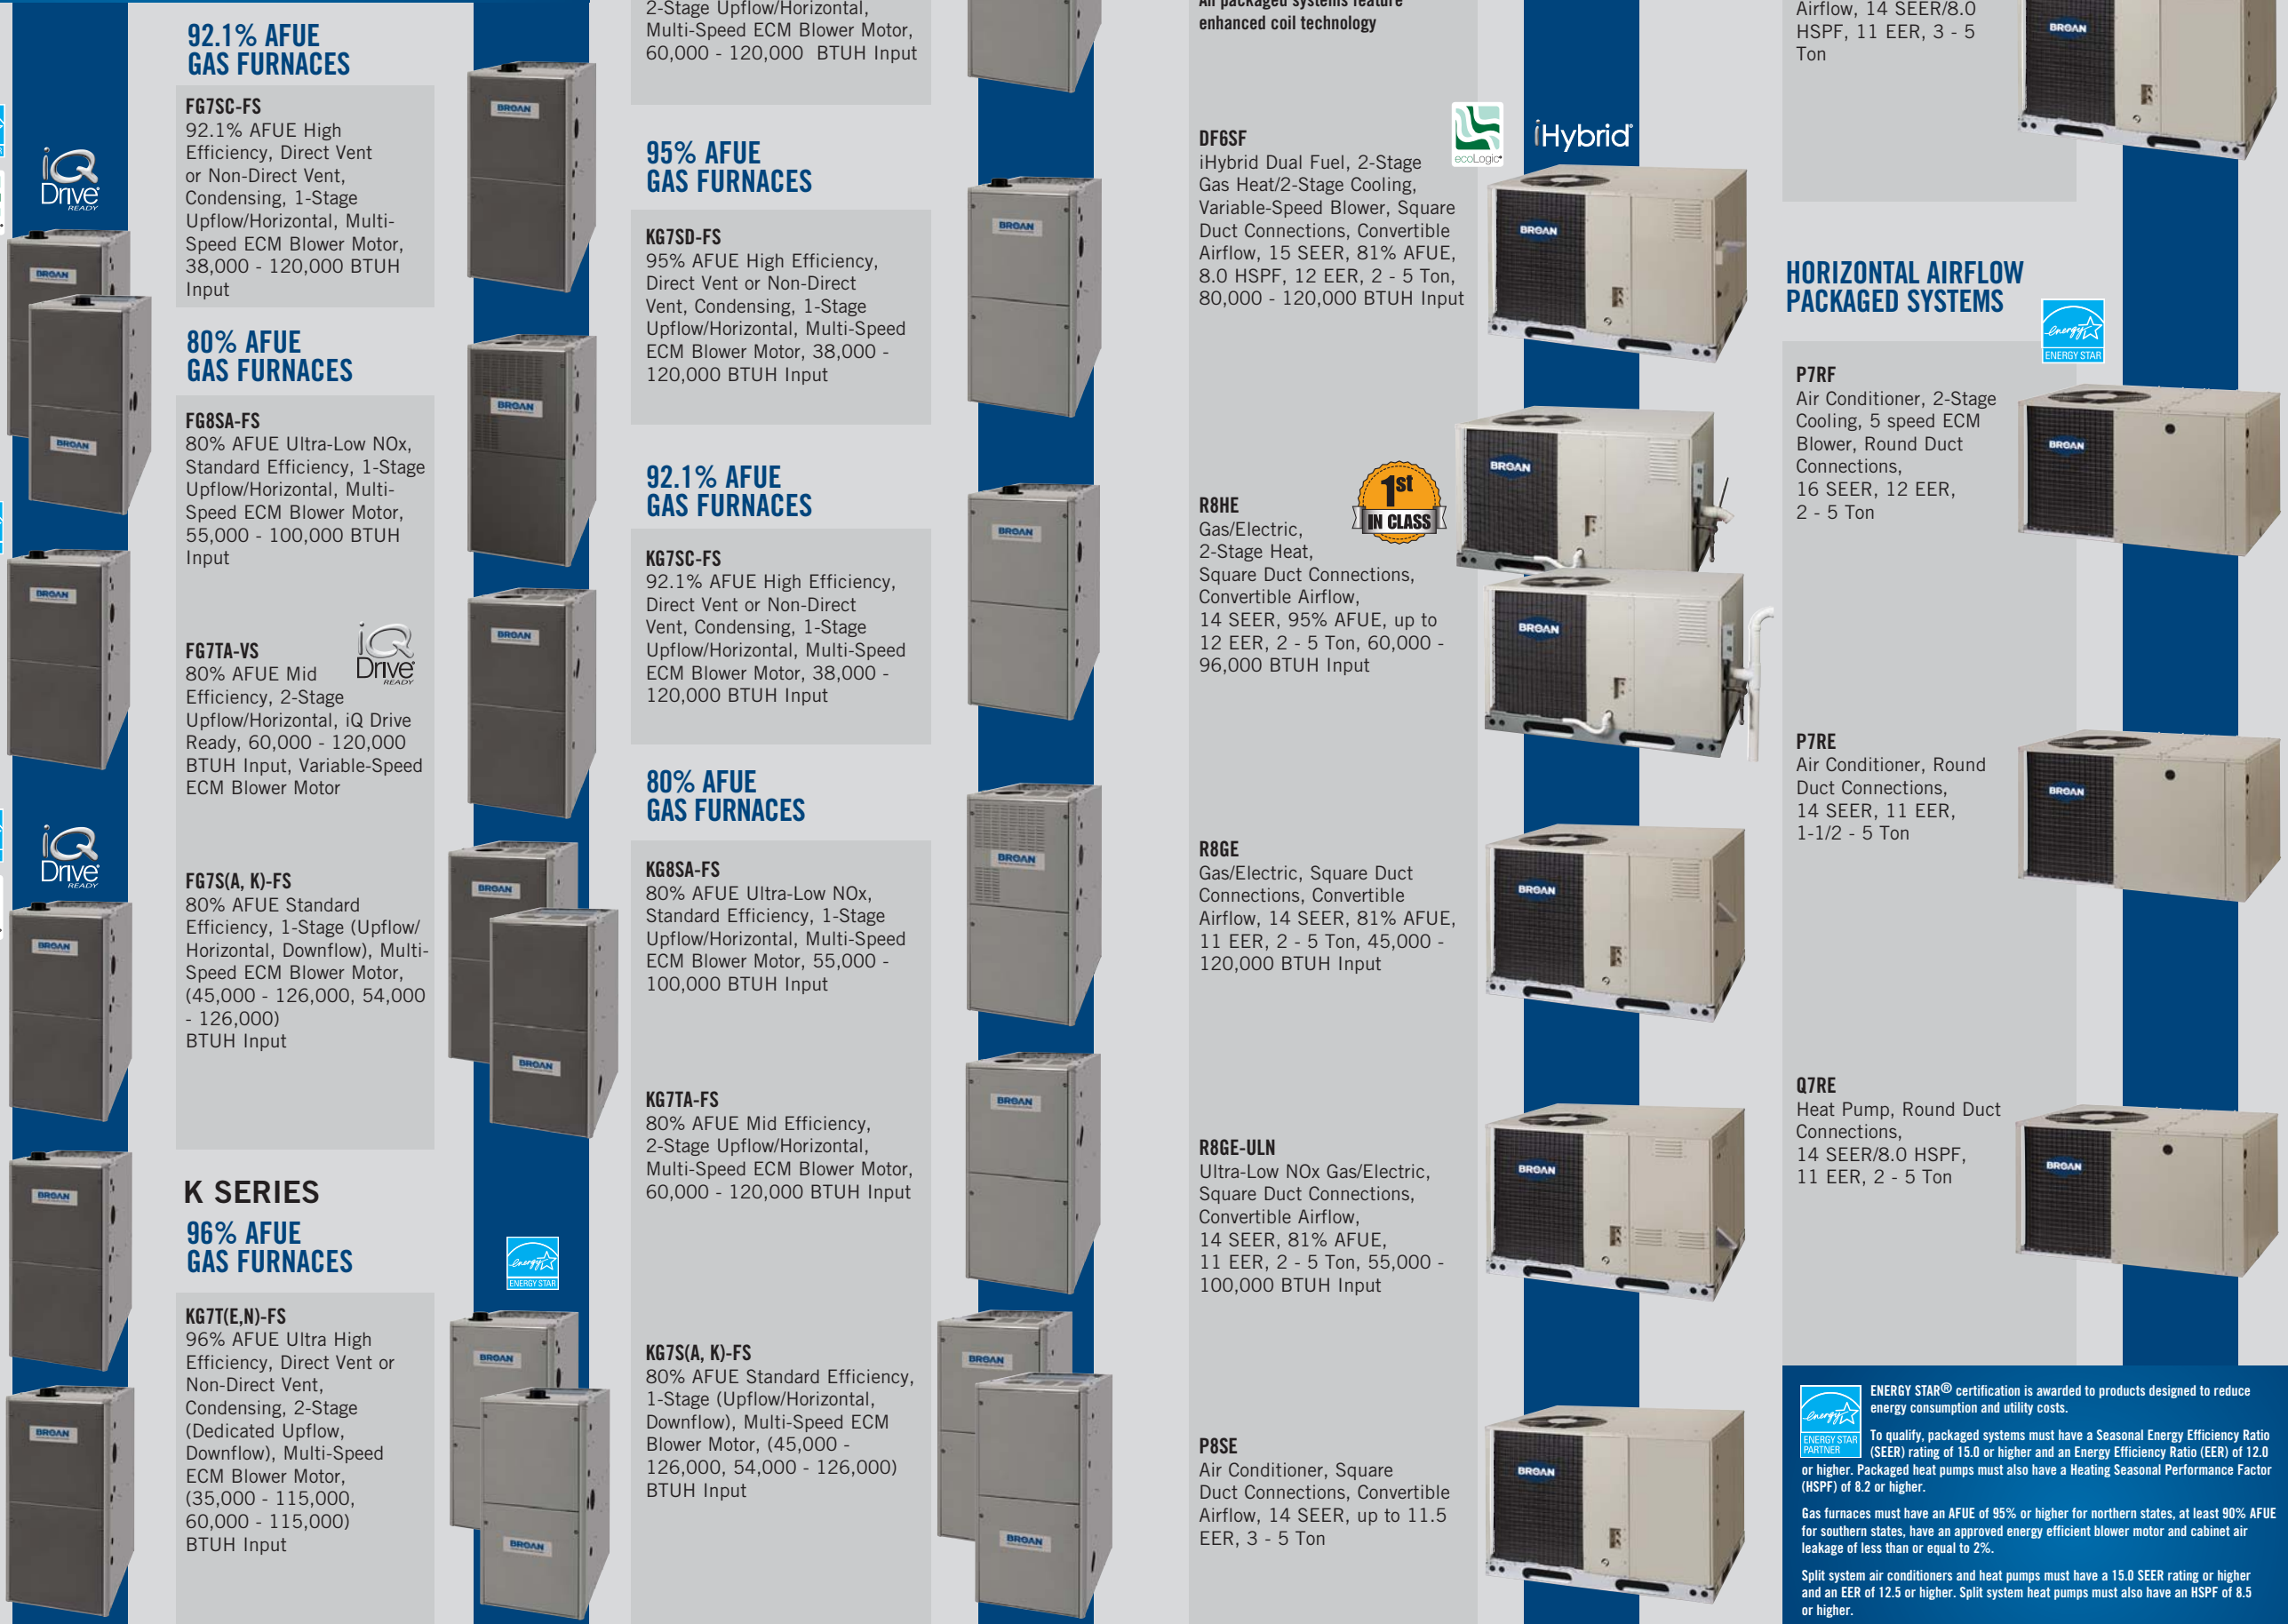



BROAN UNITS OFFER A 10-YEAR LIMITED WARRANTY ON ALL PARTS TO THE ORIGINAL OWNER, WHEN REGISTERED. PLUS THE BROAN QUALITY PLEDGE ON SELECT MODELS, WHICH STATES IF WITHIN THE FIRST 10 YEARS THE COMPRESSOR OR FURNACE HEAT EXCHANGER FAILS BROAN WILL REPLACE THE ENTIRE UNIT, REGISTRATION REQUIRED. K MODELS ARE EXCLUDED FROM THE QUALITY PLEDGE. AIR HANDLERS AND COILS CARRY A 3-YEAR ALL PARTS LIMITED WARRANTY AND WHEN INSTALLED WITH A MATCHED OUTDOOR UNIT, WILL CARRY THE OUTDOOR SYSTEM WARRANTY. ACCESSORIES CARRY THE 10 YEAR LIMITED PARTS WARRANTY WHEN INSTALLED AND REGISTERED WITH A COMPLETE SYSTEM. SEE WARRANTY FOR SPECIFIC DETAILS.



SPLIT SYSTEM AIR CONDITIONERS



FSA1BG
Ultra High Efficiency, 20 SEER, iQ Drive® Technology, 2 - 5 Ton Capacity



FSA1BF
Extra High Efficiency, Up to 16 SEER, 2-Stage, 2 - 5 Ton Capacity



FSA1BE
Extra High Efficiency, Up to 15 SEER, 1-1/2 - 5 Ton Capacity



FSA1BD
High Efficiency, Up to 14 SEER, 1-1/2 - 5 Ton Capacity



SPLIT SYSTEM HEAT PUMPS



FSH1BG
Ultra High Efficiency, Up to 19 SEER, 10.0 HSPF, iQ Drive Technology, 2 - 5 Ton Capacity



FSH1BF
Extra High Efficiency, Up to 16 SEER, 9.0 HSPF, 2-Stage, 2 - 5 Ton Capacity




FSH1BE
High Efficiency, Up to 15 SEER, 8.5 HSPF, 1-1/2 - 5 Ton Capacity



AIR HANDLERS


B6VMMX
ECM Variable-Speed Motor, Multi-Poised, TXV

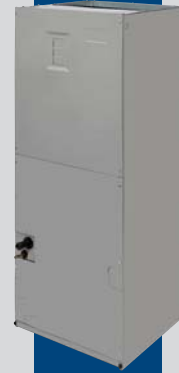

B6BMMX
Multi-Poised, Vertical/Horizontal, Multi-Speed, TXV




B6BMMO
Multi-Poised, Multi-Speed

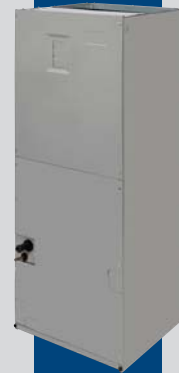

AIR HANDLERS

B6EMMX
ECM Fixed-Speed Motor, Multi-Poised, TXV

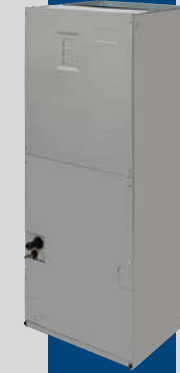

B6BW
Vertical Wall Mount



MB7VM
Modular Variable-Speed Model (matched with a cased coil easily creates a 2 piece Air Handler)



INDOOR COILS

C7BAMO
A, B, C and D sizes available in various capacities

Cased, Uncased & Vertical/Horizontal, Multi-poised versions available



C7BHMO
A, B, C and D sizes available in various capacities

Cased, Horizontal, Multi-poised versions available



C7BHMx
Factory-installed TXV

A, B and C sizes available in various capacities



Cased, Horizontal, Multi-poised versions available

C6BH-X
A, B, C and D sizes available in various capacities

Cased Horizontal



Specifications and illustrations subject to change without incurring obligation.