

MAYTAG

TECHNICAL SPECIFICATIONS

Model PAH4VMX

Anteater™
COIL TECHNOLOGY



M1200 Product Line

**R-410A Variable Speed Air Handler with TXV
14 Plus SEER Residential System**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE – 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- **Product registration required for 12 year All Parts Warranty within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**




The PAH4VMX Series of air handlers, when combined with our heat pump or air conditioner, offers a full line of quality, split system heating and cooling equipment.

Features and Benefits

- **ECM Variable Speed Motor:** New technology allows for 12 selected cooling airflows and 4 heating airflows to match any application.
- **Quiet Blower Operation:** Extra quiet and smooth blower on and off cycles.
- **Constant airflow:** Motor automatically adjusts to different static loads.
- **Pre-programmed delay profile:** Increase efficiency and comfort.
- **Reduced air stratification:** This results in improved air quality by optimizing humidity removal and filtration capabilities.
- **Multi-poised:** Can be used in horizontal, upflow, downflow and vertical applications.
- **Built in Filter Rack:** Makes the air handler easy to service.
- **Plug-in Heater Kits:** Available in 5 kw through 30 kw
- **Breaker Accessibility:** Breaker accessible from the front of the unit when heater is applied.
- **Plastic Drain Pan:** Provides corrosion resistance.
- **Durable Cabinet:** Galvanized steel with a polyurethane finish. The finish will endure 950 hours of salt spray and resist corrosion 50% better than comparable units.
- **Circuit Board:** Incorporating blower delay relay, low voltage terminal strip, and heat-strip sequencing.
- **Ease-of-Service:** Plug-in wire connections and built-in filter rack makes the air handler easy to service.
- **No Fasteners on Sides or Back:** Smooth surfaces for installations.
- **Thermal Expansion Valve:** Factory installed externally equalized thermal expansion valve provides precise refrigerant control under varying load conditions.
- **Cabinet Insulation:** 1" insulation with an R-value of 4.2 contributes to quiet operation and prevents cabinet sweating in difficult applications.
- **Designed to meet the requirements 610.2A.2:** Meets Florida building code requirements for air leakage.
- **Anteater™ Coil Technology:** Helps prevent leaks caused by formicary corrosion.

IDENTIFICATION CODE

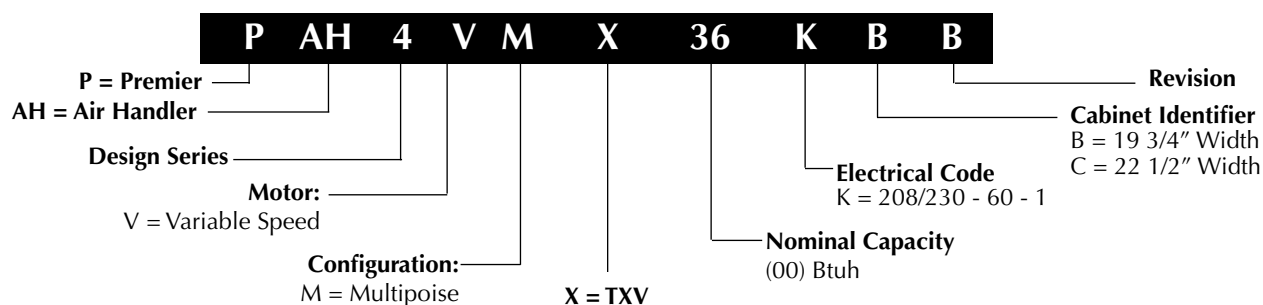

ACCESSORIES

Accessory Kit Description	Cabinet Size			Part Number
	A	B	C	
Downflow Adaptor Kit	X			917342
		X		919321
			X	919322
Single Circuit Adaptor for 2 Circuit Breakers	X	X	X	913874
Single Circuit Adaptor for 3 Circuit Breakers	n/a	n/a	X	913556

SPECIFICATIONS

Model PAH4VMX	24K-A	24K-B	30K-A	30K-B	36K-B	48K-B	48K-C	60K-C
Refrigerant Flow Control	TXV	TXV	TXV	TXV	TXV	TXV	TXV	TXV
Maximum Available Auxiliary Heat (kw)	10	20	15	20	20	20	30	30
Nominal Blower Size (D X W)	10 x 6	11 x 8	10 x 6	11 x 8	11 x 8	11 x 8	11 x 10	11 x 10
Variable Speed Motor HP	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
CFM*	540 - 1165	720 - 1450	540 - 1165	720 - 1390	720 - 1450	720 - 1450	1075 - 2150	1075 - 2150
Filter Size	12 x 20 x 1	18 x 20 x 1	12 x 20 x 1	18 x 20 x 1	18 x 20 x 1	18 x 20 x 1	20 x 20 x 1	20 x 20 x 1
Approximate Shipping Weight (lbs.)	91	120	91	111	140	140	170	170

NOTE: See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

AIRFLOW SETTING


A-CABINET						B-CABINET										C-CABINET				
CFM	Switch Number				Nominal Capacity		CFM	Switch Number				Nominal Capacity		CFM	Switch Number				Nominal Capacity	
	1	2	3	4	1.5	2.0		2.5	3.0	3.5	4.0	1	2		3	4	3.0	3.5	4.0	5.0
540	0	0	0	1			720	0	0	0	1			1075	0	0	0	1		
600	0	0	0	0			800	0	0	0	0			1135	1	0	0	1		
660	0	0	1	0			850	1	0	0	1			1225	0	0	0	0		
715	1	0	0	1			880	0	0	1	0			1295	1	0	0	0		
790	1	0	0	0			945	1	0	0	0			1380	0	0	1	0		
870	1	0	1	0			1040	1	0	1	0			1460	1	0	1	0		
915	0	1	0	1			1085	0	1	0	1			1525	0	1	0	1		
955	1	1	0	1			1140	1	1	0	1			1625	1	1	0	1		
1015	0	1	0	0			1205	0	1	0	0			1740	0	1	0	0		
1060	0	1	1	0			1265	1	1	0	0			1860	1	1	0	0		
1075	1	1	0	0			1325	0	1	1	0			1960	0	1	1	0		
1165	1	1	1	0			1390	1	1	1	0			2090	1	1	1	0		

Note: 1 = ON, 0 = OFF

ELECTRICAL DATA


Model Number H6HK-	Voltage	KW	Variable Speed Air Handler							
			Min. Circuit Ampacity				Max. Over-Current Protection			
			Circuit A	Circuit B	Circuit C	Single Circuit	Circuit A	Circuit B	Circuit C	Single Circuit
005H-XX	240	4.8	-	-	-	33.5	-	-	-	40
008H-XX	240	7.5	-	-	-	48.1	-	-	-	50
010H-XX	240	9.6	-	-	-	58.5	-	-	-	60
015H-XX	240	14.4	58.5	25.0	-	83.5	60	30	-	90
020H-XX	240	19.2	58.5	50.0	-	108.5	60	50	-	125
025H-XX	240	24.0	58.5	50.0	25.0	133.5	60	30	30	150
030H-XX	240	28.8	58.5	50.0	50.0	158.5	60	50	60	175
005H-XX	208	3.6	-	-	-	30.9	-	-	-	40
008H-XX	208	5.6	-	-	-	43.1	-	-	-	50
010H-XX	208	7.2	-	-	-	52.5	-	-	-	60
015H-XX	208	10.8	52.5	21.6	-	74.2	60	30	-	80
020H-XX	208	14.4	52.5	43.3	-	95.8	60	50	-	100
025H-XX	208	18.0	52.5	43.3	21.6	74.2	60	30	25	125
030H-XX	208	21.6	52.5	43.3	43.3	95.8	60	50	50	150
009Q-XX	240	9.0	-	-	-	35.6	-	-	-	40
015Q-XX	240	14.4	-	-	-	51.9	-	-	-	60
009Q-XX	208	6.8	-	-	-	32.1	-	-	-	40
015Q-XX	208	10.8	-	-	-	46.0	-	-	-	50

IDENTIFICATION CODE

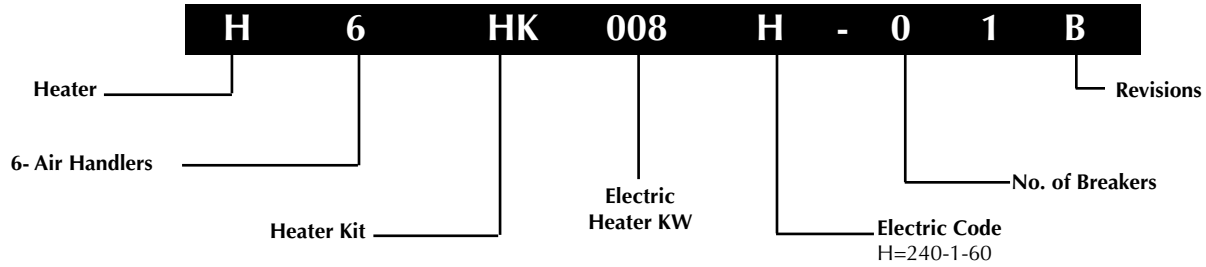

DIMENSIONS

Models PAH4VMX	Height	Width	Refrigerant Connections		Filter Size	Supply Air Duct Dimensions
			Suction Dia.	Liquid Dia.		
24K-A	43 1/2	14 1/4	3/4	3/8	12 x 20 x 1	12 7/8 x 12 3/4
24K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
30K-A	43 1/2	14 1/4	3/4	3/8	12 x 20 x 1	12 7/8 x 12 3/4
30K-B	43 1/2	19 3/4	3/4	3/8	18 x 20 x 1	12 7/8 x 18 1/4
36K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
48K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
48K-C	56	22 1/2	7/8	3/8	20 x 20 x 1	12 7/8 x 21
60K-C	56	22 1/2	7/8	3/8	20 x 20 x 1	12 7/8 x 21

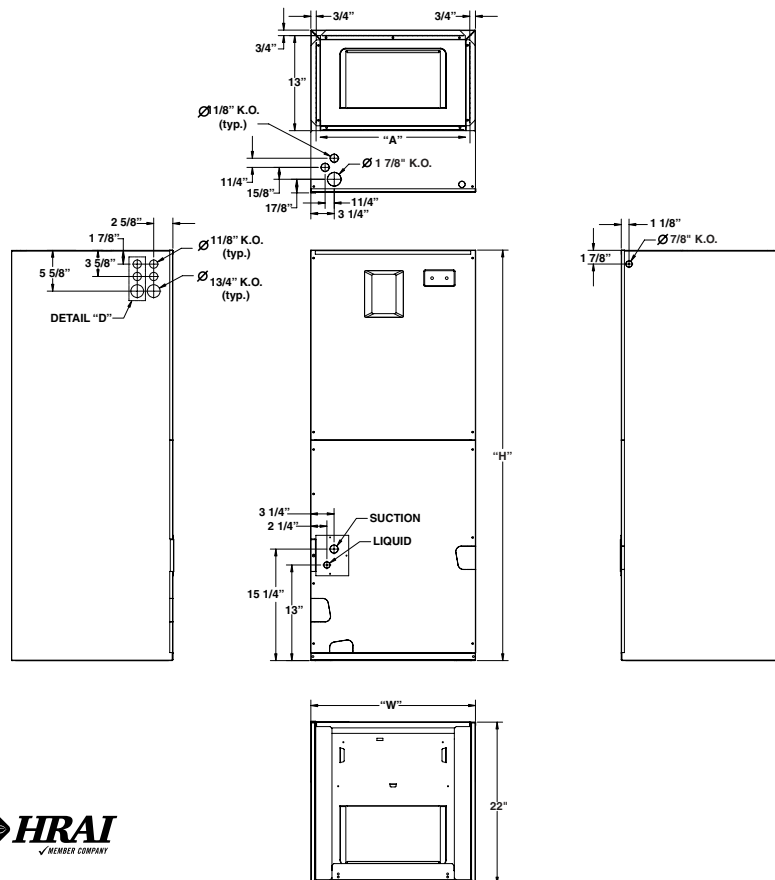

MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ®Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2011. All rights reserved.

302D-0711 (Replaces 302D-0409)

Printed in U.S.A. (07/11)